




Technical Data

DOUBLE-ROLL TOILET TISSUE DISPENSER WITH CONTROLLED DELIVERY

B-265

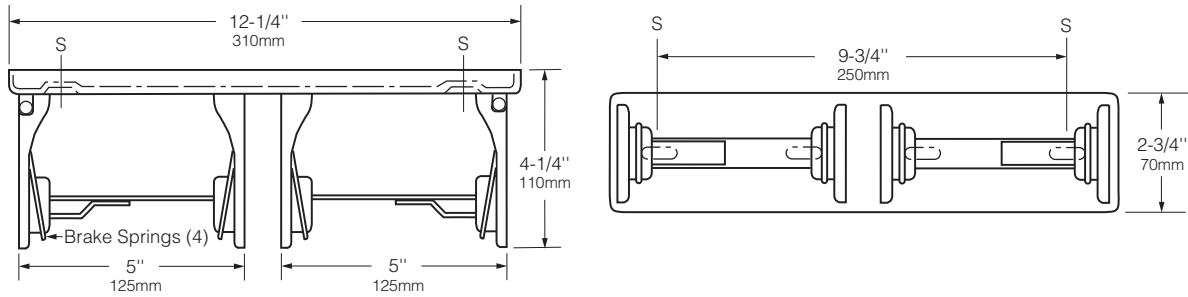

MATERIALS:

Heavy-gauge chrome-plated steel with bright polished finish. Mounting bracket is 18-gauge (1.2mm). Equipped with vandal-resistant self-locking mechanisms and four heavy-duty brake springs.

OPERATION:

Heavy-duty brake springs provide controlled delivery. Toilet tissue rolls will not spin freely. Eliminates waste. Accommodates two standard-core toilet tissue rolls up to 4-1/2" (115mm) diameter. Toilet tissue rolls cannot be removed from holder until empty.

Instructions for changing toilet tissue roll:

1. Spread apart arms on either side of the empty toilet tissue roll.
2. Pull out the center ring with the empty roll, and remove the empty roll.
3. Place new toilet tissue roll on center ring.
4. Spread apart arms and push toilet tissue roll back into dispenser.
5. Dispenser is loaded.

INSTALLATION:

Mount unit on wall or toilet partition with four sheet-metal screws, furnished by manufacturer, at points indicated by an S.

For plaster or dry wall construction, provide concealed backing to comply with local building codes, then secure unit with sheet-metal screws furnished. For other wall surfaces, provide fiber plugs or expansion shields for use with sheet-metal screws, or provide 1/8" (3mm) toggle bolts or expansion bolts.

For partitions with particle-board or other solid core, secure with sheet-metal screws, or provide through-bolts, nuts, and washers. For hollow-core metal partitions, provide solid backing into which sheet-metal screws can be secured.

SPECIFICATION:

Double-roll toilet tissue dispenser shall be heavy-gauge chrome-plated steel with bright polished finish. Unit shall be equipped with vandal-resistant self-locking mechanisms, provide controlled delivery operation, and accommodate two standard-core toilet tissue rolls up to 4-1/2" (115mm) diameter. Manufacturer's service and parts manual shall be provided to the building owner/manager upon request.

Double-Roll Toilet Tissue Dispenser shall be Model B-265 of Bobrick Washroom Equipment, Inc., Clifton Park, New York; Jackson, Tennessee; Los Angeles, California; Bobrick Washroom Equipment Company, Scarborough, Ontario; Bobrick Washroom Equipment Pty. Ltd., Australia; Bobrick Washroom Equipment Limited, United Kingdom.